

# Technical data sheet

Roof conductor holder for tiled, slated and corrugated roofs, with crossbar  
Item number: 5202248



- With weatherproof clamping collar from soft PVC
- Required drill hole  $\varnothing = 16 \text{ mm}$
- Spacer from polyamide, grey

**PA** Polyamide

## Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 5202248                  |
| Type                               | 133 A                    |
| Description 1                      | Roof conductor holder    |
| Description 2                      | with over-piece          |
| Manufacturer                       | OBO                      |
| Dimension                          | 50mm                     |
| Material                           | Polyamide                |
| Smallest sales unit                | 20                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 8.217 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2819 kg CO2e / 1 Piece |


# Technical data sheet

Roof conductor holder for tiled, slated and corrugated roofs, with crossbar

Item number: 5202248



## Dimensions

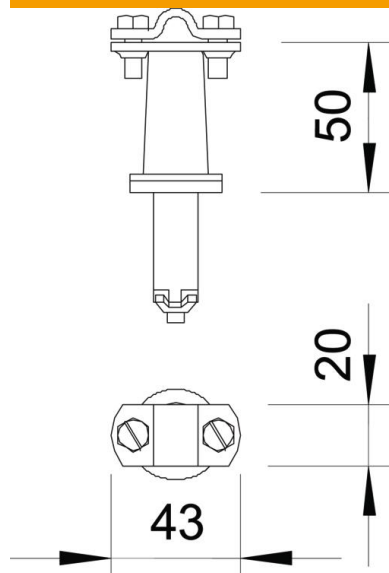

## Technical data

|                          |                 |
|--------------------------|-----------------|
| Application              | Corrugated roof |
| Conductor fastening type | With screw clip |
| Conductor diameter, max. | 10              |
| Conductor diameter, min. | 8               |
| Mounting type            | Miscellaneous   |
| Mounting height          | 50 mm           |
| Fit                      | Rd 8-10 mm      |
| Material of the holder   | Plastic         |
| Material of the support  | Plastic         |