Technical data sheet Screw plug, PG thread

Item number: 2090295





Screw plug N in accordance with DIN 46320, with PG thread to DIN 40430.

In conjunction with sealing ring, types 107, 170 or 171, protection rating IP68 (5 bar/1 hr).

Sealing ring not contained in the scope of delivery.

* Prices according to DEL notation.

CuZn

Brass

N

Nickel-plated


Master data

Item number	2090295
Туре	168 MS PG29
Description 1	Screw plug
Manufacturer	OBO
Dimension	PG29
Material	Brass
Surface	Nickel-plated
Surface standard	
Smallest sales unit	50
Unit of quantity	Piece
Weight	4.31 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	0,1078 kg CO2e / 1 Piece

Technical data sheet Screw plug, PG thread



Item number: 2090295

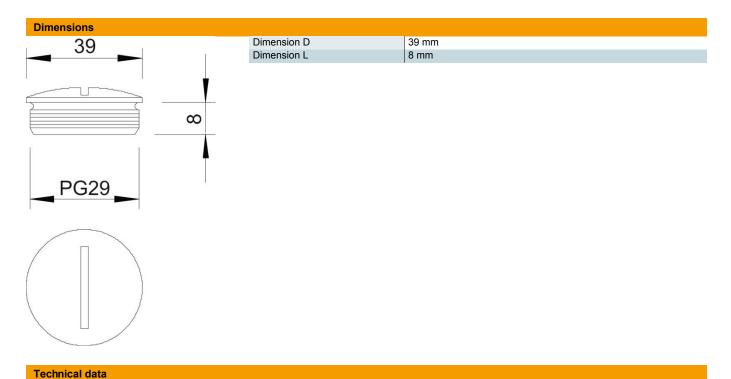

explosion-proof	no
For Ex zone gas	Without
For Ex zone dust	Without
Thread	Pg 29
Thread type	PG
Naminal throad size metric/PC	20

Thread type PG
Nominal thread size metric/PG 29
Thread increase 1.59 mm
Fibre-glass reinforced no
Halogen-free yes
Impact-resistant no
Protection rating IP68