

Technical data sheet

Flat conductor, galvanised steel

Item number: 5019355



- Can be used as a conductor and earthing conductor according to DIN EN 62561-2 (VDE 0185-561-2)
- Complies with the requirements of VDE 0185-305 (IEC 62305)
- Zinc coating: $\geq 500 \text{ g/m}^2$ (approx. $70 \text{ }\mu\text{m}$ in mean value)
- For lightning protection, earthing systems and ring equipotential bonding



St Steel

FT Hot-dip galvanised

Master data

Item number	5019355
Type	5052 DIN 40X4
Description 1	Steel strip
Description 2	50 kg ring
Manufacturer	OBO
Dimension	40x4mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	40
Unit of quantity	Metre
Weight	128 kg
Weight unit	kg/100 m


Technical data sheet

Flat conductor, galvanised steel

Item number: 5019355



Dimensions

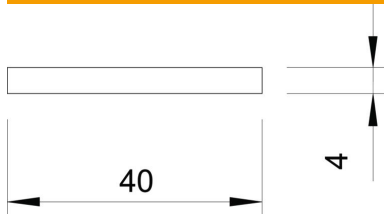

Width	40 mm
Height	4 mm
Dimension B	40 mm
Dimension H	4 mm

Technical data

Normal ring (ca. kg)	51
Nomal ring (approx. m)	40
Length tolerance $\pm$	5 %
Cross-section	160 mm ²