


# Technical data sheet

## Spacer clip 732 FT

Item number: 1362386

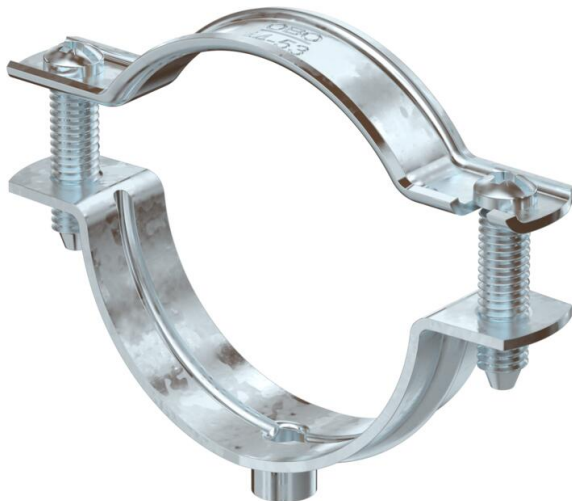

Spacer clip for the installation of pipes and cables on walls, ceiling and floors. With self-locking upper part. Surfaces G and FT from a clip size of 20 are suitable for installation with a nail device or a bolt-firing tool.

Approved for the maintenance of electrical function according to DIN 4102 Part 12, maintenance of electrical function classes E30 to E90.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                             |
|------------------------------------|-----------------------------|
| Item number                        | 1362386                     |
| Type                               | ASG 732 53 FT               |
| Description 1                      | Distance saddle             |
| Description 2                      | with threaded connection M6 |
| Manufacturer                       | OBO                         |
| Dimension                          | 44-53mm                     |
| Material                           | Steel                       |
| Surface                            | Hot-dip galvanised          |
| Surface standard                   | DIN EN ISO 1461             |
| Smallest sales unit                | 20                          |
| Unit of quantity                   | Piece                       |
| Weight                             | 4.942 kg                    |
| Weight unit                        | kg/100 pc.                  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1388 kg CO2e / 1 Piece    |


# Technical data sheet

## Spacer clip 732 FT

Item number: 1362386



### Dimensions

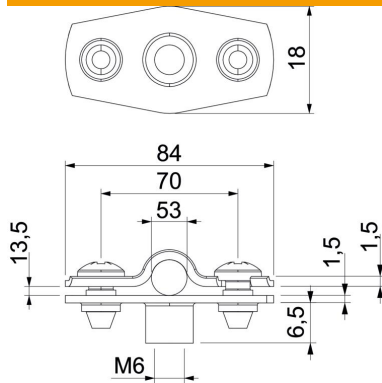

|                   |         |
|-------------------|---------|
| Dimension A       | 84 mm   |
| Dimension B       | 70 mm   |
| Dimension b       | 18 mm   |
| Dimension D       | 53 mm   |
| Dimension d max.  | 53 mm   |
| Dimension d min.  | 44 mm   |
| Dimension H1      | 6.5 mm  |
| Dimension t1 (mm) | 1.5     |
| Dimension t2 (mm) | 1.5     |
| Dimension x       | 13.5 mm |

### Technical data

|                               |                     |
|-------------------------------|---------------------|
| Distance to the wall          | yes                 |
| Number of cables/pipes        | 1                   |
| Version for                   | Closed              |
| Fastening type                | Threaded connection |
| Maintain electrical functions | yes                 |
| For diameter                  | 44 - 53             |
| Halogen-free                  | yes                 |
| Plastic-covered               | no                  |
| Material thickness            | 1.5 mm              |
| Clamping range D, max.        | 53 mm               |
| Clamping range D, min.        | 44 mm               |
| UV-resistant                  | yes                 |