


# Technical data sheet

## Spacer clip 733 FT

Item number: 1362734

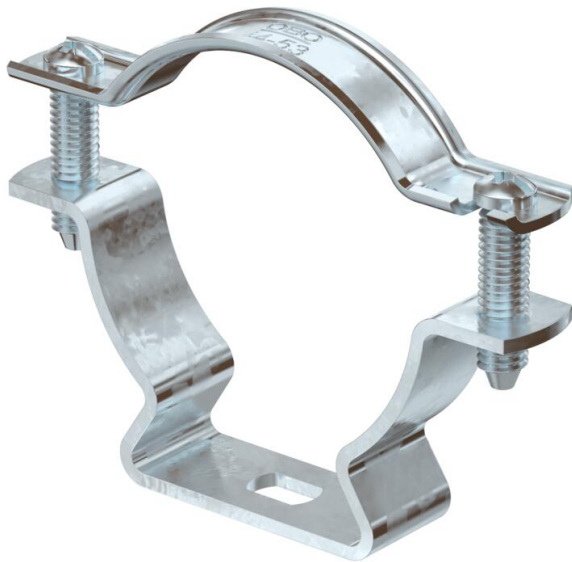

Spacer clip for the installation of pipes and cables on walls, ceilings and floors.  
With self-locking cover. Fastening via slot.

Approved for the maintenance of electrical function according to DIN 4102 Part 12, maintenance of electrical function classes E 30 to E 90.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 1362734                  |
| Type                               | ASL 733 53 FT            |
| Description 1                      | Distance saddle          |
| Description 2                      | with slot                |
| Manufacturer                       | OBO                      |
| Dimension                          | 44-53mm                  |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanised       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 20                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 5.85 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1781 kg CO2e / 1 Piece |


# Technical data sheet

## Spacer clip 733 FT

Item number: 1362734



### Dimensions

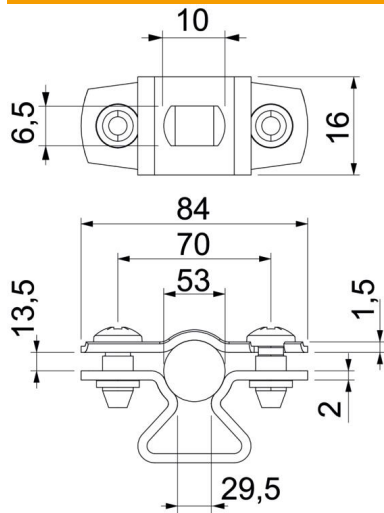

|                   |         |
|-------------------|---------|
| Dimension A       | 84 mm   |
| Dimension B       | 70 mm   |
| Dimension b       | 16 mm   |
| Dimension D       | 53 mm   |
| Dimension d max.  | 53 mm   |
| Dimension d min.  | 44 mm   |
| Dimension L       | 10 mm   |
| Dimension s       | 29.5 mm |
| Dimension t1 (mm) | 1.5     |
| Dimension t2 (mm) | 2       |
| Dimension x       | 13.5 mm |

### Technical data

|                               |            |
|-------------------------------|------------|
| Distance to the wall          | yes        |
| Number of cables/pipes        | 1          |
| Version for                   | Closed     |
| Fastening type                | Screw hole |
| Maintain electrical functions | yes        |
| For diameter                  | 44 - 53    |
| Halogen-free                  | yes        |
| Plastic-covered               | no         |
| Material thickness            | 1.5 mm     |
| Clamping range D, max.        | 53 mm      |
| Clamping range D, min.        | 44 mm      |
| UV-resistant                  | yes        |