

# Technical data sheet

## Clamp clip 2056 H-foot, 1-fold, metal pressure sleeve, A2

Item number: 1186129



Clamp clip with hammerhead foot, metal pressure sleeve with rounded edges to protect the cable. For vertical and horizontal mounting of 1 single cable on a C-profile rail. For a slot width 16–17 mm. With 1-start screw thread on pressure sleeve, universal hexagonal screw head WAF10, with slot and cross recess. Suitable for assembly indoors and outdoors. We recommend the use of a counter-sleeve.



|    |                 |
|----|-----------------|
| A2 | Stainless steel |
| 2B | Bright, treated |

| Master data                        |                          |  |
|------------------------------------|--------------------------|--|
| Item number                        | 1186129                  |  |
| Type                               | BS-H1-M-34 A2            |  |
| Description 1                      | Clamp clip 2056          |  |
| Manufacturer                       | OBO                      |  |
| Dimension                          | 28-34mm                  |  |
| Material                           | Stainless steel 1.4301   |  |
| Surface                            | Bright, treated          |  |
| Surface standard                   |                          |  |
| Smallest sales unit                | 25                       |  |
| Unit of quantity                   | Piece                    |  |
| Weight                             | 7.7 kg                   |  |
| Weight unit                        | kg/100 pc.               |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,3798 kg CO2e / 1 Piece |  |


# Technical data sheet

## Clamp clip 2056 H-foot, 1-fold, metal pressure sleeve, A2

Item number: 1186129



### Dimensions

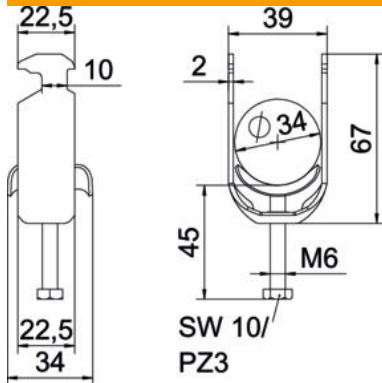

|                  |         |
|------------------|---------|
| Length           | 22.5 mm |
| Width            | 39 mm   |
| Height           | 67 mm   |
| Plate thickness  | 2 mm    |
| Dimension A      | 22.5 mm |
| Dimension B      | 39 mm   |
| Dimension C      | 34 mm   |
| Dimension G (mm) | M6      |
| Dimension H      | 67 mm   |
| Dimension L      | 46 mm   |
| Dimension t      | 2 mm    |

### Technical data

|                                                |                              |
|------------------------------------------------|------------------------------|
| Number of cables/pipes                         | 1                            |
| Maintain electrical functions                  | yes                          |
| For pipe diameter, max.                        | 34 mm                        |
| For pipe diameter, min.                        | 28 mm                        |
| for rail with slot width (with interval), max. | 17 mm                        |
| for rail with slot width (with interval), min. | 16 mm                        |
| Thread                                         | M6                           |
| Halogen-free                                   | yes                          |
| Length of external dimensions                  | 34 mm                        |
| Max. Tightening torque                         | 3 Nm                         |
| With plastic trough                            | no                           |
| With metal trough                              | yes                          |
| Mounting type                                  | Profile rail                 |
| Slot width                                     | 10 mm                        |
| Clamping range D, max.                         | 34 mm                        |
| Clamping range D, min.                         | 28 mm                        |
| Surface addition                               | Untreated                    |
| Material addition                              | Rustproof steel              |
| With counter-trough                            | no                           |
| Material of trough                             | Rustproof steel              |
| Material quality of trough                     | Stainless steel 304 (1.4301) |