


Technical data sheet

CL2008 profile rail, slot 11 mm, perforated

Item number: 1106120



Light-duty C profile rail for cable routing, in conjunction with series clips or clamp clips with N foot. Can also be used in building of control cabinets.  
Perforated, on "A" can be broken every 10 cm.



- St

Steel
- FS

Strip galvanized

| Master data                        |                          |  |
|------------------------------------|--------------------------|--|
| Item number                        | 1106120                  |  |
| Type                               | CL2008BP2000FS           |  |
| Description 1                      | Profile rail             |  |
| Description 2                      | perforated, slot 11mm    |  |
| Manufacturer                       | OBO                      |  |
| Dimension                          | 2000x20x8                |  |
| Material                           | Steel                    |  |
| Surface                            | Strip galvanized         |  |
| Surface standard                   | DIN EN 10346             |  |
| Smallest sales unit                | 2                        |  |
| Unit of quantity                   | Metre                    |  |
| Weight                             | 21.1 kg                  |  |
| Weight unit                        | kg/100 m                 |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5148 kg CO2e / 1 Meter |  |


# Technical data sheet

## CL2008 profile rail, slot 11 mm, perforated

Item number: 1106120



### Dimensions

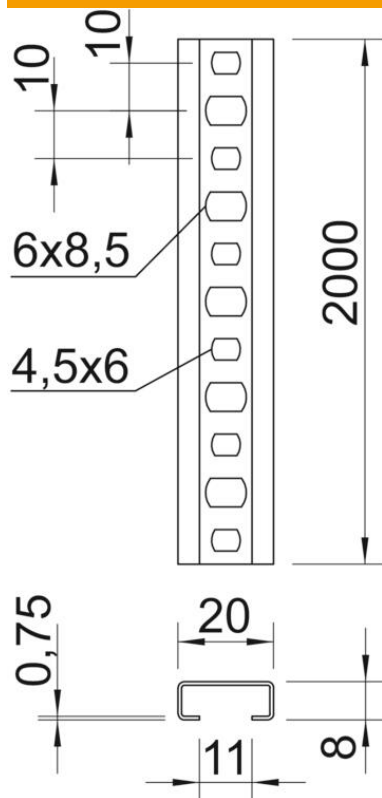

|             |          |
|-------------|----------|
| Length      | 2,000 mm |
| Width       | 20 mm    |
| Height      | 8 mm     |
| Dimension L | 2,000 mm |

### Technical data

|                               |                      |
|-------------------------------|----------------------|
| Breakable                     | yes                  |
| Type of perforation           | Perforated back      |
| Version for                   | Single profile       |
| Drill hole spacing, centre    | 10 mm                |
| Bundle                        | 20 m                 |
| Maintain electrical functions | no                   |
| Material thickness            | 0.75 mm              |
| With perforation              | yes                  |
| With toothing                 | no                   |
| Profile shape                 | C profile            |
| Slot width                    | 11 mm                |
| Static value A                | 0.24 cm <sup>2</sup> |
| Static value I <sub>y</sub>   | 0.02 cm <sup>4</sup> |
| Static value I <sub>z</sub>   | 0.17 cm <sup>4</sup> |
| Static value W <sub>y</sub>   | 0.02 cm <sup>3</sup> |
| Static value W <sub>z</sub>   | 0.17 cm <sup>3</sup> |