

# Technical data sheet

CML3518 profile rail, slot 17 mm, FS, perforated

Item number: 1104241



Profile rail, perforated, slot width 17 mm, 150 x 35 x 18



- St** Steel
- FS** Strip galvanized

| Master data                        |                          |  |
|------------------------------------|--------------------------|--|
| Item number                        | 1104241                  |  |
| Type                               | CML3518P0150FS           |  |
| Description 1                      | Profile rail             |  |
| Description 2                      | perforated, slot 17mm    |  |
| Manufacturer                       | OBO                      |  |
| Dimension                          | 150x35x18                |  |
| Material                           | Steel                    |  |
| Surface                            | Strip galvanized         |  |
| Surface standard                   | DIN EN 10346             |  |
| Smallest sales unit                | 25                       |  |
| Unit of quantity                   | Piece                    |  |
| Weight                             | 10.6 kg                  |  |
| Weight unit                        | kg/100 pc.               |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2761 kg CO2e / 1 Piece |  |


# Technical data sheet

## CML3518 profile rail, slot 17 mm, FS, perforated

Item number: 1104241



### Dimensions

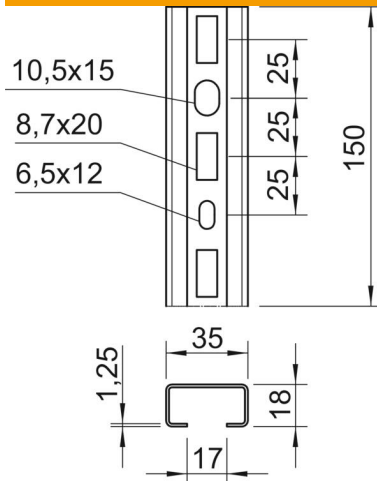

|             |        |
|-------------|--------|
| Length      | 150 mm |
| Width       | 35 mm  |
| Height      | 18 mm  |
| Dimension L | 150 mm |

### Technical data

|                               |                      |
|-------------------------------|----------------------|
| Breakable                     | no                   |
| Type of perforation           | Perforated back      |
| Version for                   | Single profile       |
| Drill hole spacing, centre    | 25 mm                |
| Maintain electrical functions | yes                  |
| Material thickness            | 1.25 mm              |
| With perforation              | yes                  |
| With toothing                 | no                   |
| Profile shape                 | C profile            |
| Rustproof steel, pickled      | no                   |
| Slot width                    | 17 mm                |
| Static value A                | 0.88 cm <sup>2</sup> |
| Static value I <sub>y</sub>   | 0.41 cm <sup>4</sup> |
| Static value I <sub>z</sub>   | 1.81 cm <sup>4</sup> |
| Static value W <sub>y</sub>   | 0.41 cm <sup>3</sup> |
| Static value W <sub>z</sub>   | 1.03 cm <sup>3</sup> |