Technical data sheet

Data technology support, 1 module, straight outlet, type PA



Item number: 6119230



Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connecti-

on modules in the mounting opening.

The type PA data technology support is suitable for accepting the following data connection modules: Panduit: Mini-Com.

For installation in Rapid 45 and Rapid 80 device installation trunking, ISS service

poles and underfloor systems.

Polycarbonate

Master data


Item number	6119230
Туре	DTG-2PA AL1
Description 1	Data technology support
Description 2	f. 2 connection modules type P
Manufacturer	OBO
Dimension	45x45mm
Colour	Aluminium painted
Material	Polycarbonate
Smallest sales unit	1
Unit of quantity	Piece
Weight	1.1 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	0,1922 kg CO2e / 1 Piece

Technical data sheet

Data technology support, 1 module, straight outlet, type PA



Item number: 6119230

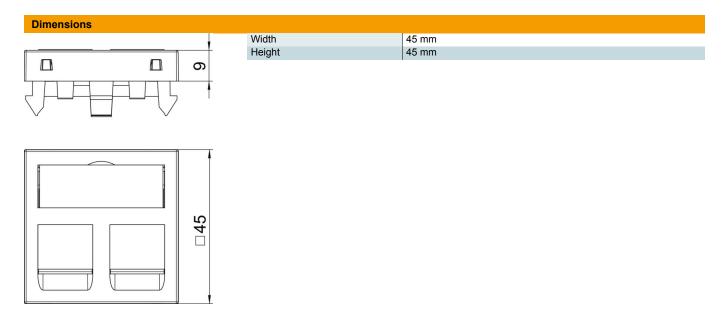

	ica	

Surface version Matt Fastening type Lock Labelling panel With labelling panel Halogen-free yes Hinged cover no Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no		
Labelling panel With labelling panel Halogen-free yes Hinged cover no Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no	Surface version	Matt
Halogen-free yes Hinged cover no Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no	Fastening type	Lock
Hinged cover no Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no	Labelling panel	With labelling panel
Lamp-wire connector no With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no	Halogen-free	yes
With printed label no With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no	Hinged cover	no
With dust protection yes Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no	Lamp-wire connector	no
Mounting opening Type PA Protection rating IP20 Depth 9 mm Support ring no	With printed label	no
Protection rating IP20 Depth 9 mm Support ring no	With dust protection	yes
Depth 9 mm Support ring no	Mounting opening	Type PA
Support ring no	Protection rating	IP20
• • • • • • • • • • • • • • • • • • • •	Depth	9 mm
	Support ring	no
Transparent no	Transparent	no
Use Installable data connector	Use	Installable data connector
Strain relief option no	Strain relief option	no
Combination Basic element with central cover plate	Combination	Basic element with central cover plate