

# Technical data sheet

## GES9-3B service outlet with handle clamp

Item number: 7405079



Service outlet with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in trunking systems and system floors for indoor use.

Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.

Up to 9 installation devices with 50 mm central plate can be inserted.

Service outlet with handle clamp, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed. Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.



PA Polyamide

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 7405079                  |
| Type                               | GES9-3B U 9011           |
| Description 1                      | Service outlet           |
| Description 2                      | for universal mounting   |
| Manufacturer                       | OBO                      |
| Dimension                          | 264x264x67               |
| Colour                             | Graphite black; RAL 9011 |
| Material                           | Polyamide                |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 205 kg                   |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 6,2518 kg CO2e / 1 Piece |


# Technical data sheet

## GES9-3B service outlet with handle clamp

Item number: 7405079



### Dimensions

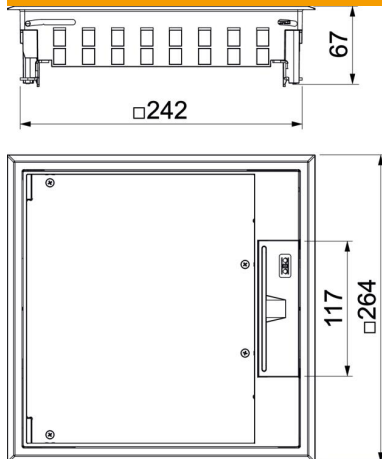

|        |        |
|--------|--------|
| Length | 264 mm |
| Width  | 264 mm |
| Height | 67 mm  |

### Technical data

|                                                   |                         |
|---------------------------------------------------|-------------------------|
| Number of installable devices                     | 12                      |
| Number of mounting boxes                          | 3                       |
| Version for                                       | Square                  |
| Cable outlet version                              | Swivellable cord outlet |
| Floor covering protection frame                   | yes                     |
| Floor care                                        | Dry                     |
| Seal installation option                          | no                      |
| Floor height, min.                                | 73 mm                   |
| Suitable for raised floor installation            | yes                     |
| Suitable for screed-flush closed underfloor ducts | no                      |
| Suitable for screed-covered underfloor ducts      | yes                     |
| Suitable for cavity floor installation            | yes                     |
| Suitable for wet care                             | no                      |
| Suitable for underfloor box                       | 250/350                 |
| Suitable for underfloor ducts                     | yes                     |
| Device support to accept mounting boxes           | yes                     |
| Length of external dimensions                     | 264 mm                  |
| Length of installation dimensions                 | 244 mm                  |
| With floor covering recess                        | yes                     |
| Nominal size for device installation units        | 9                       |
| Frame version                                     | Carpet protection frame |
| Protection rating (IP) when used                  | IP20                    |
| Protection rating (IP) when unused                | IP40                    |
| Protection rating IK code                         | IK08                    |
| Heavy-duty version                                | no                      |
| Clamping range D, max.                            | 76 mm                   |
| Clamping range D, min.                            | 8 mm                    |
| Installation system type                          | UT4                     |

# Technical data sheet

## GES9-3B service outlet with handle clamp

Item number: 7405079



### Technical data

|                               |            |
|-------------------------------|------------|
| Vertical load, large area     | to 5,000 N |
| Vertical load, small area     | to 3,000 N |
| Approvals                     | VDE        |
| Opening mechanism             | Handle     |
| Floor covering thickness      | 5 mm       |
| Floor covering thickness max. | 10 mm      |