

Technical data sheet

Service outlet with blanking cover and Allen slot, GES R2,
chrome

Item number: 7408876



Service outlet with blanking cover and Allen slot for GES R2 floor socket for direct installation in the MT R2 installation socket in indoor areas.

The cover version can be used as a cable outlet.

When closed, the floor socket can be wet-cleaned.



Die-cast zinc

Chrome-plated

Master data

| | |
|------------------------------------|-----------------------------|
| Item number | 7408876 |
| Type | GES R2B Cr |
| Description 1 | Floor socket |
| Description 2 | blind with Allen key recess |
| Manufacturer | OBO |
| Material | Die-cast zinc |
| Surface | Chrome-plated |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 58.32 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2076 kg CO2e / 1 Piece |


Technical data sheet

Service outlet with blanking cover and Allen slot, GES R2, chrome

Item number: 7408876



Dimensions

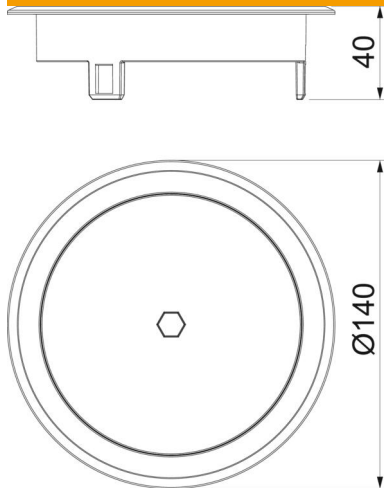

Technical data

| | |
|--|-----------------|
| Version for | Round |
| Cable outlet version | No cable outlet |
| Floor covering protection frame | yes |
| Floor care | Wet |
| Suitable for raised floor installation | yes |
| Suitable for cavity floor installation | yes |
| Suitable for wet care | yes |
| Suitable for underfloor ducts | no |
| With floor covering recess | no |
| Standard | EN 50085-2-2 |
| Protection rating (IP) when unused | IP66 |
| Protection rating IK code | IK10 |
| Vertical load, large area | to 15,000 N |
| Vertical load, small area | to 3,000 N |
| Approvals | VDE |
| Opening mechanism | Tool |