

Technical data sheet

Flat angle, for device installation trunking Rapid 80 type
GK-70110
Item number: 6274320



Flat angle for changing the direction of the GK device installation trunking.
Cover must be ordered separately.



PVC Polyvinylchloride

Master data


Item number	6274320
Type	GK-F70110RW
Description 1	Flat angle
Manufacturer	OBO
Dimension	70x110mm
Colour	Pure white; RAL 9010
Material	Polyvinylchloride
Smallest sales unit	1
Unit of quantity	Piece
Weight	78 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	2,4893 kg CO2e / 1 Piece

Technical data sheet

Flat angle, for device installation trunking Rapid 80 type
GK-70110
Item number: 6274320



Dimensions

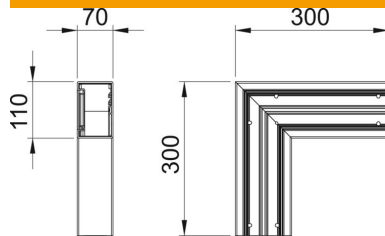

Length	300 mm
Width	110 mm
Height	70 mm

Technical data

Number of covers	1
Version for	Base
for duct width	110 mm
for trunking height	70 mm
Halogen-free	no
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Cover width	76.5 mm
Cover width 2	0 mm
Cover width 3	0 mm
Change of direction	Vertical, rising/falling
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK08
Symmetrical	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-15 °C
Angle range, max.	90 mm
Angle range, min.	90 mm