

Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type
GK-53130
Item number: 6113262



Flat angle for changing the direction of the Rapid 45-2 device installation trunking.



PVC Polyvinylchloride

Master data

Item number	6113262
Type	GK-FS53130LGR
Description 1	Flat angle
Description 2	rigid form
Manufacturer	OBO
Dimension	200x200x130
Colour	Light grey; RAL 7035
Material	Polyvinylchloride
Smallest sales unit	1
Unit of quantity	Piece
Weight	60.2 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,8749 kg CO2e / 1 Piece


Technical data sheet

Flat angle, for device installation trunking Rapid 45-2 type
GK-53130

Item number: 6113262



Dimensions

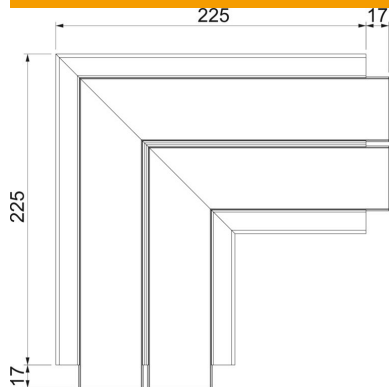

Length	225 mm
Width	130 mm
Height	53 mm

Technical data

Number of covers	2
Version for	Base and cover
for duct width	130 mm
for trunking height	53 mm
Halogen-free	no
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Cover width	45 mm
Cover width 2	45 mm
Cover width 3	0 mm
Change of direction	Vertical, rising/falling
Protection rating	IP40
Protective film	yes
Protection rating IK code	IK08
Symmetrical	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-15 °C
Angle range, max.	90 mm
Angle range, min.	90 mm