

# Tehnicki list

Plastična cev, kruta, bez halogena

Broj artikla: 2047724



Sistem elektroinstalacionih cevi od plastičnog materijala bez halogena EN 61386 (šifra:44321), za mehaničku zaštitu kablova.



Polikarbonat/Akrilnitril-Butadien-Stirol

## Matični podaci

|                            |                                          |
|----------------------------|------------------------------------------|
| Broj artikla               | 2047724                                  |
| Oznaka 1                   | Cev                                      |
| Oznaka 2                   | bez halogena                             |
| Proizvođač                 | OBO                                      |
| Dimenzija                  | Ø40, 3000mm                              |
| Boja                       | svetlo siva; RAL 7035                    |
| Materijal                  | Polikarbonat/akrilnitril-butadien-stirol |
| Najmanja prodajna jedinica | 30                                       |
| Jedinica količine          | Metar                                    |
| Težina                     | 27,1 kg                                  |
| Jedinica težine            | kg/100 kom.                              |


# Tehnicki list

Plastična cev, kruta, bez halogena

Broj artikla: 2047724




## Dimenzije



|                  |          |
|------------------|----------|
| Dužina           | 3.000 mm |
| Dimenzija D      | 40 mm    |
| Dimenzija L      | 3.000 mm |
| Dimenzija M (mm) | M40      |
| Dimenzija t      | 1,9 mm   |

M40

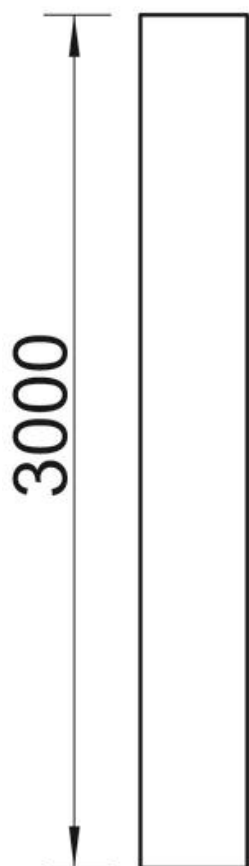

# Tehnicki list

Plastična cev, kruta, bez halogena

Broj artikla: 2047724



## Tehnički podaci

|                             |                                     |
|-----------------------------|-------------------------------------|
| Ponašanje kod savijanja     | kruto                               |
| Otpornost na pritisak       | velika opterećenja (1250 N)         |
| Upotrebna temperatura maks. | + 90 °C                             |
| Upotrebna temperatura min.  | - 15 °C                             |
| Veličina                    | M40                                 |
| bez halogena                | da                                  |
| Šifra klasifikacije         | 0                                   |
| Otpornost na udarce         | velika opterećenja (2,0 kg/ 300 mm) |