

# Technical data sheet

## Adjustable bend element 60 FT

Item number: 6225478



Adjustable bend element with welded rung for use in the cable ladder types with a side height of 60 mm.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6225478                  |
| Type                               | LGBE 660 FT              |
| Description 1                      | Adjustable bend element  |
| Description 2                      | for cable ladder         |
| Manufacturer                       | OBO                      |
| Dimension                          | 60x600                   |
| Colour                             | zinc                     |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanised       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 144 kg                   |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,9684 kg CO2e / 1 Piece |


# Technical data sheet

## Adjustable bend element 60 FT

Item number: 6225478



### Dimensions

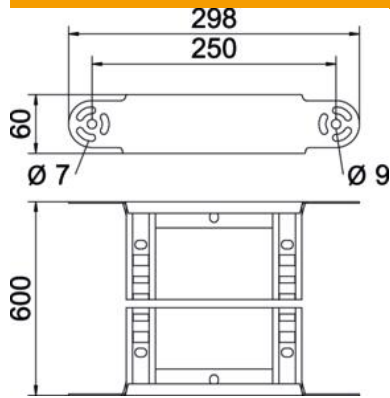

|             |        |
|-------------|--------|
| Width       | 600 mm |
| Height      | 60 mm  |
| Dimension B | 600 mm |
| Dimension R | 600 mm |

### Technical data

|                               |                          |
|-------------------------------|--------------------------|
| Bend (angle)                  | Adjustable               |
| Version of the rungs          | Profile perforated       |
| Side rail version             | Flat profile             |
| Connector version             | Integrated connector     |
| Maintain electrical functions | no                       |
| Change of direction           | Vertical, rising/falling |
| Rustproof steel, pickled      | no                       |
| Hinged                        | no                       |
| Side perforation              | no                       |
| Wide-span version             | no                       |
| Rail thickness                | 1.5 mm                   |