


Technical data sheet

Mounting plate 2 x data socket type A for System 55

Item number: 7408701

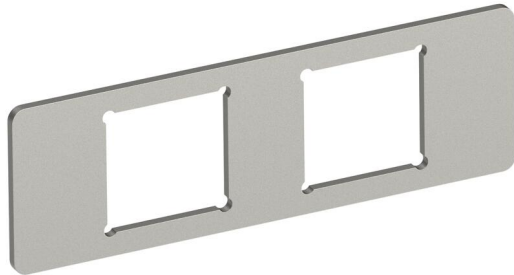

Mounting plate to accept two connection sockets for data technology of the following types: AMP TYCO: Standard 110Connect, SL Series 110Connect and Tool-less, AMP-Twist; Brand-Rex: unshielded module; GG45; TKM RJ MOD; Nexans: LANmark module with Adapter-Clip; Siemon CAT6; 3M K6 and K10.

Dimensions of a mounting opening in mm: 20.10 x 14.80.




A2 Stainless steel

Master data

| | |
|------------------------------------|-----------------------------|
| Item number | 7408701 |
| Type | MPMT45 2A |
| Description 1 | Mounting plate |
| Description 2 | with 2x hole pattern Type A |
| Manufacturer | OBO |
| Dimension | 77x24x1,5 |
| Material | Stainless steel 1.4301 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 1.43 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1733 kg CO2e / 1 Piece |

Dimensions

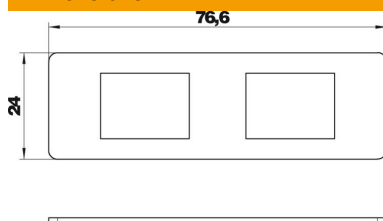

Technical data sheet

Mounting plate 2 x data socket type A for System 55

Item number: 7408701



Technical data

| | |
|--|--|
| Connection options | 2 connection sockets for data technology of the following types: AMP TYCO: Standard 110Connect, SL Series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded module; GG45; TKM RJ MOD; Nexans: LANmark module with Adapter-Clip; Siemon CAT6; 3M K6 and |
| Fastening type | Lockable |
| Labelling panel | no |
| Floor covering protection frame | no |
| Floor plate | no |
| Lowerable to be flush-floor | no |
| Seal installation option | no |
| Installation opening for on-floor tank | no |
| Decouplable | no |
| Suitable for raised floor installati- on | yes |
| Suitable for screed-flush closed underfloor ducts | yes |
| Suitable for screed-covered un- derfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for underfloor ducts | yes |
| With floor covering recess | no |
| Heavy-duty version | no |
| Strain relief option | yes |