

Technical data sheet

MS5040P mounting rail, slot 22 mm, perforated, FT

Item number: 1111560



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



- St** Steel
- FT** Hot-dip galvanised

Master data		
Item number	1111560	
Description 1	Profile rail	
Manufacturer	OBO	
Dimension	3000x50x40	
Material	Steel	
Surface	Hot-dip galvanised	
Surface standard	DIN EN ISO 1461	
Smallest sales unit	3	
Unit of quantity	Metre	
Weight	255 kg	
Weight unit	kg/100 m	
CO Footprint (GWP) Cradle-to-Gate	5,9994 kg COe / 1 Meter	


Technical data sheet

MS5040P mounting rail, slot 22 mm, perforated, FT

Item number: 1111560



Dimensions

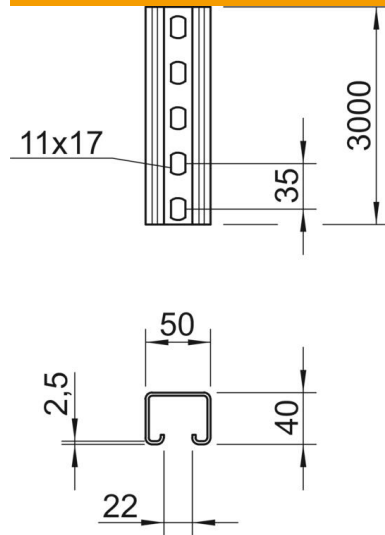

Length	3,000 mm
Width	50 mm
Height	40 mm
Dimension L	3,000 mm

Technical data

Type of perforation	3 sides perforated
Version for	Single profile
Drill hole spacing, centre	35 mm
Hole size	50x40 mm
Material thickness	2.5 mm
Profile shape	C profile
Slot width	22 mm
Static value A	2.88 cm ²
Static value I _y	7.25 cm
Static value I _z	11.04 cm
Static value W _y	2.9 cm ²
Static value W _z	5.25 cm ²