

Technical data sheet

MS4141 mounting rail, slot 22 mm, A2, side perforation

Item number: 1123016



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



A2	Stainless steel
2B	Bright, treated

Master data

Item number	1123016
Type	MSL4141PP3000A2
Description 1	Profile rail
Description 2	perforated, slot 22mm
Manufacturer	OBO
Dimension	3000x41x41
Material	Stainless steel 1.4301
Surface	Bright, treated
Surface standard	
Smallest sales unit	3
Unit of quantity	Metre
Weight	179.4 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	10,1792 kg CO2e / 1 Meter


Technical data sheet

MS4141 mounting rail, slot 22 mm, A2, side perforation

Item number: 1123016



Dimensions

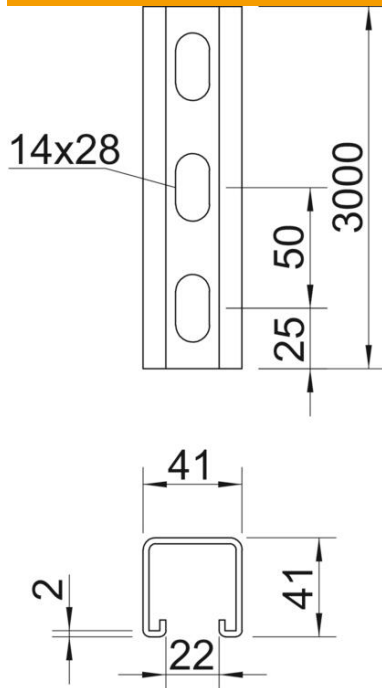

Length	3,000 mm
Width	41 mm
Height	41 mm
Dimension L	3,000 mm

Technical data

Breakable	no
Type of perforation	3 sides perforated
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Hole size	14x28 mm
Material thickness	2 mm
With perforation	yes
With tothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	2.01 cm ²
Static value I _y	5.13 cm ⁴
Static value I _z	5.88 cm ⁴
Static value W _y	2.51 cm ³
Static value W _z	2.69 cm ³