


Technical data sheet

Installation frame for three single Modul 45® devices

Item number: 7408672

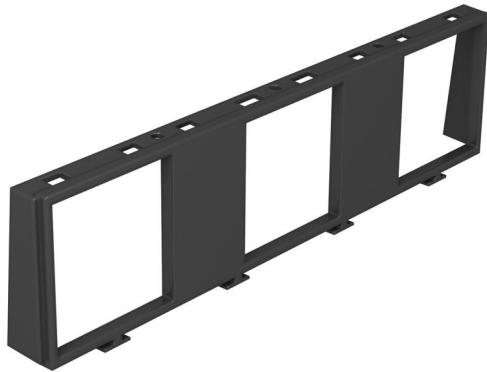

For the installation of 3 individual Modul 45 devices for System 55 service outlets with mounting support for vertical installation of Modul 45 devices.

The installation frame is designed for use with 0° sockets (mounting direction turned through 90°, contact openings at top and bottom) and their use in conjunction with angled and straight connectors.



Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

| | |
|------------------------------------|--|
| Item number | 7408672 |
| Type | MT45V 3 |
| Description 1 | Installation frame |
| Description 2 | for 3 x 1 Modul 45 |
| Manufacturer | OBO |
| Colour | Graphite black; RAL 9011 |
| Material | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 5 |
| Unit of quantity | Piece |
| Weight | 1.173 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0905 kg CO2e / 1 Piece |


Technical data sheet

Installation frame for three single Modul 45® devices

Item number: 7408672



Dimensions

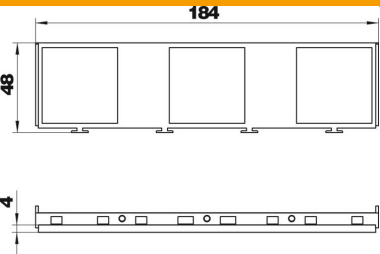

Technical data

| | |
|---|------|
| Number of installable devices | 3 |
| Floor plate | no |
| Seal installation option | no |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | yes |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for underfloor ducts | yes |
| Accessory mounting type | Lock |
| Strain relief option | yes |