


Technical data sheet

Wall and support bracket MWA 12 FS

Item number: 6424708

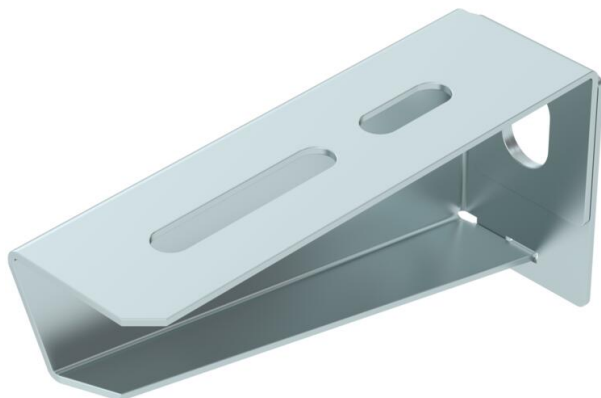

Light-duty wall and support bracket with folded design.

Without bolt M10 x 25 for fastening to U supports.

Without truss-head bolt M10 x 25 for fastening to U supports.



St

Steel

FS

Strip galvanized

Master data

Item number	6424708
Type	MWA 12 11 FS
Description 1	Wall and support bracket
Description 2	lightweight version
Manufacturer	OBO
Dimension	B110mm
Colour	zinc
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	1
Unit of quantity	Piece
Weight	12.1 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,3598 kg CO2e / 1 Piece


Technical data sheet

Wall and support bracket MWA 12 FS

Item number: 6424708



Dimensions

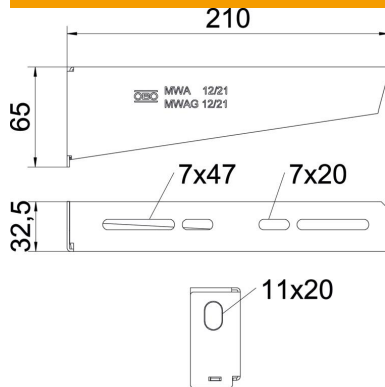

Length	32.5 mm
Width	110 mm
Width	2.09 in
Height	53 mm
Height	4 in
Dimension A	32.5 mm
Dimension B	110 mm
Dimension H	53 mm

Technical data

Version for	Wall and support bracket
F in kN	1.2 kN
Maintain electrical functions	yes
Hole diameter	11 mm
Rustproof steel, pickled	no
Angle range, max.	90 mm
Angle range, min.	90 mm

Characteristic anchor load values for wall and support bracket MWA 12

Wall fastening

	Max. load F [kN]			
	Bracket width [mm]			
Anchor type	110	210	310	410
BZ-U 8-10/75	1.2	0.95	0.7	0.65
BZ-U 10-10/90	1.2	1.2	1.2	1.2

Max. total load F = Cable weight + cable tray + bracket. The load capacity values increase considerably when used in uncracked concrete. The specified values are based on concrete of resistance grade C20/25. Comply with the installation conditions of the DIBt approval (anchors).

Load values for MWA 12 on suspended support

	Max. total load F in kN			
	Bracket length in mm			
Support	100	200	300	400
US 3 K/ 20 - 60	1.2	1.2	1.2	1.2
US 3 K/ 70 - 120	1.2	1.2	1.2	1.2
US 5 K/ 20 - 60	1.2	1.2	1.2	1.2
US 5 K/ 70 - 120	1.2	1.2	1.2	1.2