

# Technical data sheet

External corner, duct height 40 mm, pure white

Item number: 7218040



External corner with intumescent fire protection mesh for PYROLINE® Rapid PLM installation duct. Suitable for direct wall and ceiling mounting, mounting below system floors and on support systems. Tool-free joint mounting with PLM SI joint connector. The cover is snapped on without tools, allowing rapid inspection and retroassignment. The cover overhang allows offset cover mounting for continuous equipotential bonding of the entire duct section.



|           |               |
|-----------|---------------|
| <b>St</b> | Steel         |
| <b>P</b>  | Powder-coated |

## Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7218040                   |
| Type                               | PLM EC 0410 RW            |
| Description 1                      | External corner           |
| Description 2                      | with fire protection mesh |
| Manufacturer                       | OBO                       |
| Dimension                          | 320x100x320               |
| Colour                             | Pure white; RAL 9010      |
| Material                           | Steel                     |
| Surface                            | Powder-coated             |
| Surface standard                   |                           |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 142.1 kg                  |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 4,9512 kg CO2e / 1 Piece  |


# Technical data sheet

External corner, duct height 40 mm, pure white

Item number: 7218040



## Dimensions

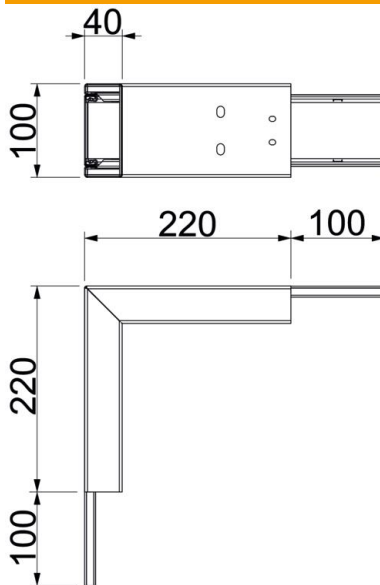

|             |        |
|-------------|--------|
| Dimension A | 220 mm |
| Dimension B | 100 mm |
| Dimension H | 40 mm  |

## Technical data

|                           |                      |
|---------------------------|----------------------|
| Number of flammable sides | 4                    |
| Cover fastening           | Miscellaneous        |
| With perforation          | yes                  |
| Usable cross-section      | 1780 mm <sup>2</sup> |
| Partitions possible       | no                   |
| Jacketing                 | Steel                |
| Angle of the bend         | 90 °                 |