# **Technical data sheet**

### T branch piece, duct height 40 mm, pure white



**Item number: 7218076** 

Tee with intumescent fire protection mesh for PYROLINE® Rapid PLM installation duct. Suitable for direct wall and ceiling mounting, mounting below system floors and on support systems. Tool-free joint mounting with PLM SI joint connector. The cover is snapped on without tools, allowing rapid inspection and retroassignment. The cover overhang allows offset cover mounting for continuous equipotential bonding of the entire duct section.



 $\epsilon$ 

St

Steel

P

Powder-coated

#### Master data


Item number	7218076	
Туре	PLM TB 0410 RW	
Description 1	T-branch	
Description 2	with fire protection mesh	
Manufacturer	OBO	
Dimension	500x300x40	
Colour	Pure white; RAL 9010	
Material	Steel	
Surface	Powder-coated	
Surface standard		
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	135.8 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to- Gate	6,0748 kg CO2e / 1 Piece	

# **Technical data sheet**

# T branch piece, duct height 40 mm, pure white



**Item number: 7218076** 

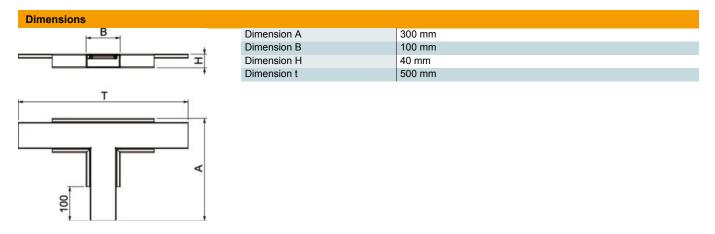

Technical data		
	Number of flammable sides	4
	Classification EI – installation duct	90
	With perforation	yes
	Usable cross-section	1780 mm²
	Partitions possible	yes
	Jacketing	Steel