


# Technical data sheet

## Height-adjustable cassette for tube body, RKFN, stainless steel

Item number: 7408980

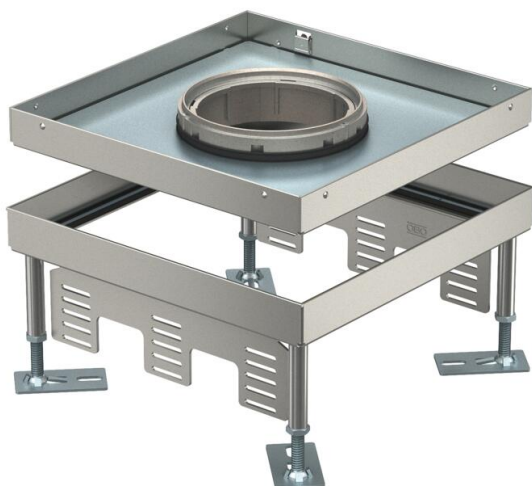

Height-adjustable cassette for tube bodies of nominal size 9 for the installation of devices in duct systems, raised and cavity floors in interior dry or wet-care floors.

For the installation of three UT4 universal supports for nine single devices with support ring/support clamp or 12 Modul 45® devices. 3 APMT5 cover plates can be installed. The tube body is not contained in the scope of delivery. Three APMT5 cover plates can be installed.



A2 Stainless steel

### Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7408980                   |
| Type                               | RKFN3 9 VS 20             |
| Description 1                      | Square cassette           |
| Description 2                      | Lid for tube body         |
| Manufacturer                       | OBO                       |
| Dimension                          | 243x243x100               |
| Material                           | Stainless steel           |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 355 kg                    |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 22,1925 kg CO2e / 1 Piece |

# Technical data sheet

## Height-adjustable cassette for tube body, RKFN, stainless steel


Item number: 7408980



### Dimensions



|             |        |
|-------------|--------|
| Length      | 243 mm |
| Width       | 243 mm |
| Height      | 105 mm |
| Dimension h | 105 mm |



### Technical data

|  |                     |
|--|---------------------|
| Number of installable devices              | 12                  |
| Number of cable outlets                    | 1                   |
| Number of universal supports               | 3 x UT4             |
| Version for                                | Square              |
| Cable outlet version                       | Lowerable tube body |
| Floor cut-out / Mounting opening           | 244x244             |
| Floor care                                 | Wet                 |
| Decouplable                                | no                  |
| Floor height, max.                         | 150 mm              |
| Floor height, min.                         | 105 mm              |
| Suitable for raised floor installation     | yes                 |
| Suitable for cavity floor installation     | yes                 |
| Suitable for underfloor box                | 250/350             |
| Device support to accept mounting boxes    | no                  |
| Length of installation dimensions          | 244 mm              |
| Nominal size for device installation units | 9                   |
| Height-adjustment range, max.              | 150 mm              |
| Height-adjustment range, min.              | 105 mm              |
| Standard                                   | EN 50085-2-2        |
| Protection rating (IP) when used           | IP20                |
| Protection rating (IP) when unused         | IP55                |
| Protection rating IK code                  | IK10                |
| Heavy-duty version                         | no                  |
| Installation system type                   | UT4                 |
| Vertical load, large area                  | to 5,000 N          |
| Vertical load, small area                  | to 3,000 N          |
| Approvals                                  | VDE                 |
| Floor covering thickness                   | 20 mm               |