

Technical data sheet

Underfloor duct, 2 pieces, 3-compartment, duct height
58 mm

Item number: 7400283



Underfloor trunking (2 piece) for routing cables in screed-covered underfloor systems, according to EN 50085-2-2. Removable and continuously lockable trunking cover. With separating retainers in the trunking base. Maximum load-bearing capacity to 1.5 kN. Only compatible with the UZD250-4/350-4
The profiled side walls offer a locking mechanism to lock the duct cover onto the duct base. The stiffening beads in the duct cover serve to create stability.



St	Steel
FS	Strip galvanized

Master data

Item number	7400283
Type	S3 25058-2
Description 1	Underfloor duct, 2-part
Description 2	3 compartments
Manufacturer	OBO
Dimension	2000x250x58
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	2
Unit of quantity	Metre
Weight	478.987 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	10,6086 kg CO2e / 1 Meter


Technical data sheet

Underfloor duct, 2 pieces, 3-compartment, duct height
58 mm

Item number: 7400283



Dimensions

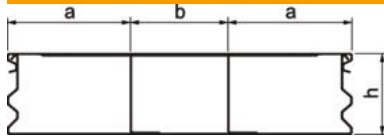

Length	2,000 mm
Width	250 mm
Height	58 mm
Dimension a	90 mm
Dimension b	70 mm
Dimension h	58 mm

Technical data

Number of fixed partitions	2
Number of compartments	3 St.
Mounting system fastening type	Floor
Floor plate	yes
Application area	Screed-covered
Decouplable	no
Trunking width, min.	250 mm
Duct height, min.	58 mm
Usable cross-section	13224 mm ²
Removable cover	yes
Cross-section, draw a	4670 mm ²
Cross-section, draw b	3884 mm ²
Vertical load, large area	to 1,500 N