

# Technical data sheet

## Hot-dip galvanised steel bend, without thread

Item number: 2046817



90° bend with moulded sleeves, for electrical installation pipes according to EN 61386-1. With burr-free inner wall.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2046817                  |
| Type                               | SBN20 FT                 |
| Description 1                      | Conduit plug-in bend     |
| Description 2                      | without thread           |
| Manufacturer                       | OBO                      |
| Dimension                          | Ø20mm                    |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanised       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 25                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 13.3 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5426 kg CO2e / 1 Piece |


# Technical data sheet

## Hot-dip galvanised steel bend, without thread

Item number: 2046817



### Dimensions

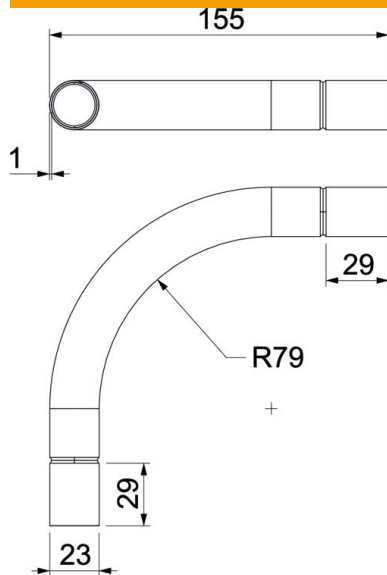

|                  |         |
|------------------|---------|
| Dimension A      | 53.7 mm |
| Dimension B      | 155 mm  |
| Dimension D      | 22.6 mm |
| Dimension d      | 20.6 mm |
| Dimension l      | 30 mm   |
| Dimension m (mm) | M20     |
| Dimension R      | 90 mm   |
| Dimension t      | 1 mm    |

### Technical data

|                                   |           |
|-----------------------------------|-----------|
| Version for                       | Connector |
| Flexible                          | no        |
| For nominal pipe diameter         | 20 mm     |
| Halogen-free                      | no        |
| With inspection opening and lid   | no        |
| With sleeve                       | yes       |
| Brushed surface                   | no        |
| Polished surface                  | no        |
| Permitted temperature range, max. | 400 °C    |
| Permitted temperature range, min. | -45 °C    |
| Angle of the bend                 | 90 °      |
| Two-part                          | no        |