

# Technical data sheet

## Hot-dip galvanised steel sleeve, without thread

Item number: 2046624



Accessory part: plug-in sleeve for the connections between electrical installation pipes. With burr-free inner wall.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2046624                  |
| Type                               | SV40W FT                 |
| Description 1                      | Conduit plug-in coupler  |
| Description 2                      | without thread           |
| Manufacturer                       | OBO                      |
| Dimension                          | Ø40mm                    |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanised       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 25                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 14.4 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,4046 kg CO2e / 1 Piece |


# Technical data sheet

## Hot-dip galvanised steel sleeve, without thread

Item number: 2046624



### Dimensions

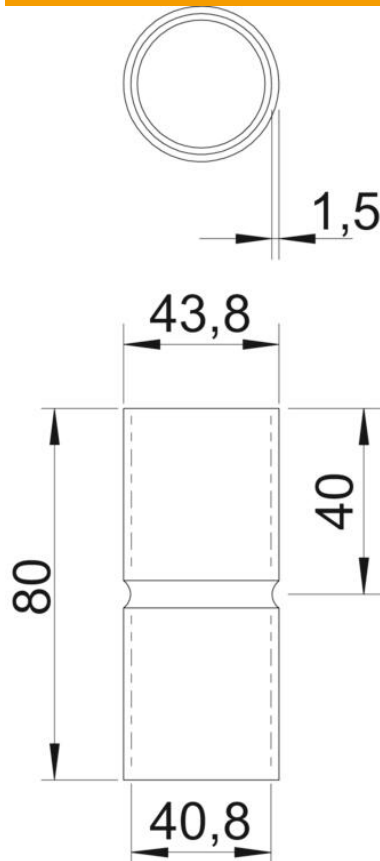

|                  |         |
|------------------|---------|
| Length           | 80 mm   |
| Dimension D      | 43.8 mm |
| Dimension d      | 40.8 mm |
| Dimension L      | 80 mm   |
| Dimension l      | 40 mm   |
| Dimension m (mm) | M40     |
| Dimension t      | 1.5 mm  |

### Technical data

|                                   |           |
|-----------------------------------|-----------|
| Version for                       | Connector |
| for pipe diameter                 | 40 mm     |
| Size                              | 40        |
| Halogen-free                      | yes       |
| With inspection opening and lid   | no        |
| Brushed surface                   | no        |
| Polished surface                  | no        |
| Permitted temperature range, max. | 400 °C    |
| Permitted temperature range, min. | -45 °C    |
| Two-part                          | no        |