

Technical data sheet

Underfloor box for GES9

Item number: 7427434



Square installation housing for one GES9-2 service outlet for the use in screed floors for indoor use. With pre-marked insertion openings for pipelines (M25) on all four sides.

In the as-delivered state, the installation housing is closed with a mounting protection lid.

The minimum installation depth is 70 mm, the height-adjustment range + 30 mm.

St	Steel
VZ	galvanised

Master data

Item number	7427434
Type	UDHOME BOX 9 EX
Description 1	Installation Housing f. GES9-3
Description 2	Screed height 95-125mm
Manufacturer	OBO
Dimension	246x252x100
Material	Steel
Surface	galvanised
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	209 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	8,3002 kg CO2e / 1 Piece


Technical data sheet

Underfloor box for GES9


Item number: 7427434



Dimensions

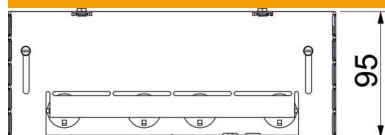

Length	246 mm
Width	246 mm
Dimension h	95 mm

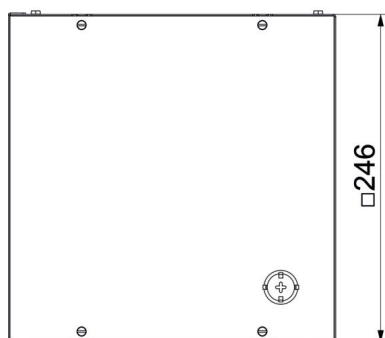

Technical data

Screed height, max.	125 mm
Screed height, min.	95 mm
Minimum screed height	95
Nominal size for device installation units	9
Height-adjustment range, min.	30 mm