

# Technical data sheet

## UP Flush-mounted device connection box 66, with nail straps

Item number: 2003716



Flush-mounted device box with nail straps, for use in masonry with an installation depth of at least 66 mm.

- 4 x 3 screw domes
- Connector with bayonet lock, couplable on both sides
- 6 combination pipe entries of Ø 20 and 25 mm
- 4 entries up to Ø 20 mm
- 2 entries up to Ø 14 mm
- 1 entry up to Ø 20 mm in the base

Tested according to DIN EN 60670-1, DIN EN 60670-22 and DIN 49073-1.



**PP** Polypropylene

### Master data

|                                    |                             |
|------------------------------------|-----------------------------|
| Item number                        | 2003716                     |
| Type                               | UG 66-NL                    |
| Description 1                      | UP Flush-mounted device box |
| Description 2                      | with nail straps            |
| Available from                     | 01.10.2021                  |
| Manufacturer                       | OBO                         |
| Dimension                          | Ø60mm, H66mm                |
| Colour                             | Jet black                   |
| Material                           | Polypropylene               |
| Smallest sales unit                | 25                          |
| Unit of quantity                   | Piece                       |
| Weight                             | 2.65 kg                     |
| Weight unit                        | kg/100 pc.                  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0646 kg CO2e / 1 Piece    |


# Technical data sheet

## UP Flush-mounted device connection box 66, with nail straps

Item number: 2003716



### Dimensions

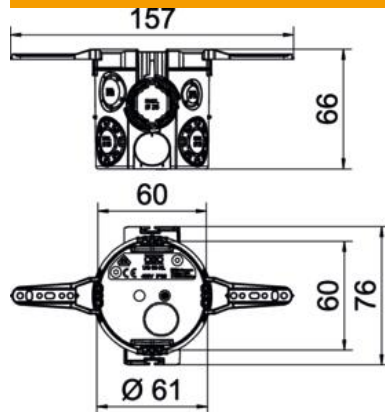

|        |       |
|--------|-------|
| Height | 66 mm |
|--------|-------|

### Technical data

|                                  |   |
|----------------------------------|---|
| No. of entries                   | 13  |
| Type of entry                    | NYM cables, data cables and corrugated pipes            |
| Type of housing penetration      | Break-out opening                                       |
| Version for                      | Single  |
| Type                             | Device connection box                                   |
| Device fixing                    | Screws or spreading claws                               |
| Cover                            | Without   |
| Cover fastening                  | Screws ,  |
| Entry from rear                  | yes   |
| Flame-resistant                  | acc. to VDE 0471/IEC 60695-2-11, test temperature 650°C |
| Shape                            | Round   |
| for pipe diameter                | 20/25 mm  |
| Halogen-free                     | yes   |
| Combination entries Ø 20 / 25 mm | 6   |
| With nail strap                  | yes   |
| With bolts                       | no  |
| Nominal cross-section, max.      | 2.5 mm <sup>2</sup>                                     |
| Nominal cross-section, min.      | 1.5 mm <sup>2</sup>                                     |
| Pipe entries Ø 20 mm             | 3   |
| Impact-resistant                 | no  |
| Protection rating                | IP30  |
| Airtight                         | no  |
| Rated voltage                    | 400 V   |