

# Technical data sheet

90° vertical bend, falling 160 FT

Item number: 6230733



90° vertical bend, for all wide span cable ladders of 160 mm side height.  
For further stabilisation, additional supports should be planned for the area of the fittings.



St

Steel

FT

Hot-dip galvanised

## Master data

|                                    |                                |
|------------------------------------|--------------------------------|
| Item number                        | 6230733                        |
| Type                               | WLBF 90 163 FT                 |
| Description 1                      | 90° bend falling               |
| Description 2                      | for wide span cable ladder 160 |
| Manufacturer                       | OBO                            |
| Dimension                          | 160x300                        |
| Colour                             | zinc                           |
| Material                           | Steel                          |
| Surface                            | Hot-dip galvanised             |
| Surface standard                   | DIN EN ISO 1461                |
| Smallest sales unit                | 1                              |
| Unit of quantity                   | Piece                          |
| Weight                             | 1335 kg                        |
| Weight unit                        | kg/100 pc.                     |
| CO2 Footprint (GWP) Cradle-to-Gate | 33,8259 kg CO2e / 1 Piece      |


# Technical data sheet

90° vertical bend, falling 160 FT

Item number: 6230733



## Dimensions

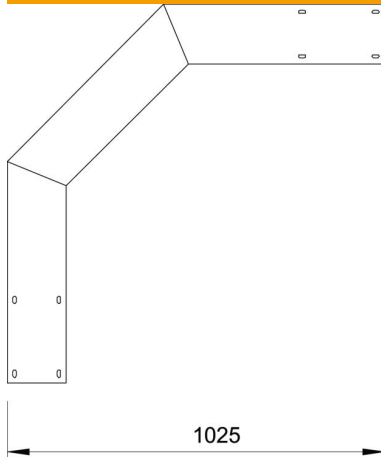

|             |        |
|-------------|--------|
| Width       | 300 mm |
| Height      | 160 mm |
| Dimension B | 300 mm |
| Dimension R | 300 mm |

## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Bend (angle)                  | 90°                  |
| Version of the rungs          | Profile unperforated |
| Side rail version             | Flat profile         |
| Maintain electrical functions | no                   |
| Change of direction           | Vertical, falling    |
| Rustproof steel, pickled      | no                   |
| Side perforation              | no                   |
| Wide-span version             | yes                  |
| Rail thickness                | 2 mm                 |