# Tehnicki list

## US 7-plafonski nosač

## Broj artikla: 6339212

Plafonski nosač (U-profil) dimenzija 70 x 50 mm sa zavarenom čeonom pločom. Za pričvršćivanje na horizontalne betonske plafone i čelične nosače. Od širine konzole 400mm ili montaže konzole na kraju plafonskog nosača, preporučuje se primena odstojnika tipa DSK 61.

St čelik

FT toplo pocinkovano potapanjem

### Matični podaci

| | |
|---|---|
| Broj artikla | 6339212 |
| Tip | US 7 K 130 FT |
| Oznaka 1 | Viseća drška |
| Oznaka 2 | sa zavarenom čeonom pločom |
| Proizvođač | OBO |
| Dimenzija | 70x50x1300 |
| Boja | cink |
| Materijal | Čelik |
| Površina | vruće pocinkano utapanjem |
| Standard za površinu | DIN EN ISO 1461 |
| Najmanja prodajna jedinica | 1 |
| Jedinica količine | Komad |
| Težina | 636 kg |
| Jedinica težine | kg/100 pari |
| CO2 otisak (GWP) od kolevke do kapije | 14,4176 kg CO2e / 1 Komad |

# Tehnicki list

## US 7-plafonski nosač

## Broj artikla: 6339212

### Dimenzije

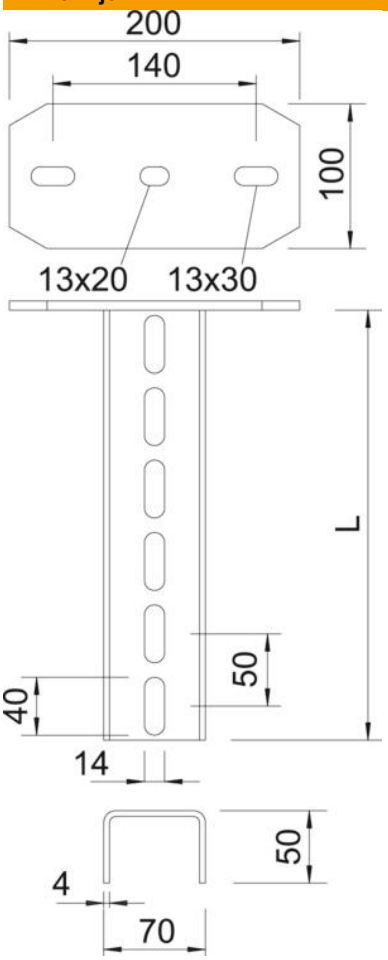


| | |
|---|---|
| Dužina | 1.300 mm |
| Širina | 70 mm |
| Visina | 50 mm |
| Dimenzija L | 1.300 mm |

### Tehnički podaci

| | |
|---|---|
| Varijanta | U-profil |
| Dužina konzole 200 | 8,3 kN |
| Dužina konzole 400 | 5 kN |
| Dužina konzole 600 | 3,5 kN |
| Održavanje funkcionalnosti | da |
| Debljina materijala | 4 mm |
| maksimalno vučno opterećenje | 11 kN |
| Usaglašeno sa ROHS | da |

# Tehnicki list

## US 7-plafonski nosač

## Broj artikla: 6339212

### Zaťaženie

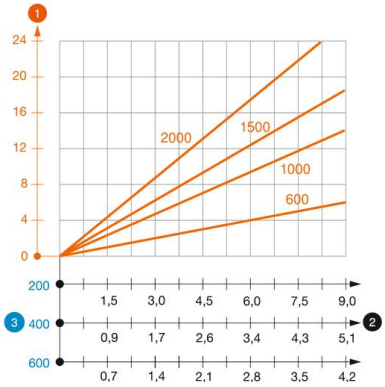


**Dijagram opterećenja U-nosač tip US 7 K**

1. Defleksija kraja plafonskog nosača pri dozvoljenom opterećenju konzole
2. Dozvoljeno opterećenje konzole u kN bez dodatnog opterećenja
3. Dužina konzole u mm

— Kriva opterećenja sa dužinama nosača u mm

### Parametri opterećenja Tipl za nosač US 7 K

| jednostrano opterećenje | | | | | | |
|---|---|---|---|---|---|---|
| | Maksimalno opterećenje [kN] | | | | | |
| | Širina konzole [mm] | | | | | |
| Tip tipla | 110 | 210 | 310 | 410 | 510 | 610 |
| BZ3 10x90/0-30 | 3,97 | 3,03 | 2,44 | 2,04 | 1,76 | 1,54 |
| BZ3 12x110/0-35 | 5,16 | 3,90 | 3,15 | 2,64 | 2,27 | 1,99 |

Max. total load F = cable weight + cable tray + bracket + suspended support. The tabular values for double-sided loads take the available axis spacing ai = 10 cm into account. The stated values are based on uncracked concrete of compressive strength C20/25. Please comply with the installation conditions of ETA(anchors).