

# Technical data sheet

Mounting plate for the installation of data sockets in  
GESRM2, 1 x type LE  
Item number: 7407628



Mounting plate to accept a data connection module of the following type:  
LexCom 125 and 250 Kat 5e (shielded).

Dimensions of a mounting opening in mm: 19.30 x 14.80.




A2 Stainless steel

## Master data

|                                    |                              |
|------------------------------------|------------------------------|
| Item number                        | 7407628                      |
| Type                               | MPRM2 1LE                    |
| Description 1                      | Mounting plate               |
| Description 2                      | with 1x hole pattern Type LE |
| Manufacturer                       | OBO                          |
| Material                           | Stainless steel 1.4301       |
| Smallest sales unit                | 1                            |
| Unit of quantity                   | Piece                        |
| Weight                             | 1.6 kg                       |
| Weight unit                        | kg/100 pc.                   |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,215 kg CO2e / 1 Piece      |

## Dimensions

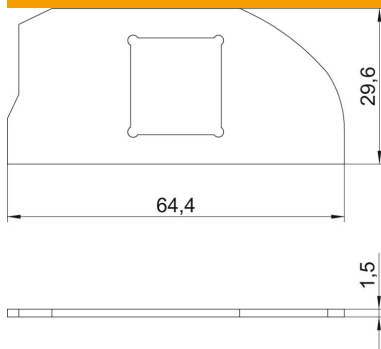

|        |         |
|--------|---------|
| Length | 64.4 mm |
| Width  | 29.6 mm |
| Height | 1.5 mm  |

# Technical data sheet

Mounting plate for the installation of data sockets in  
GESRM2, 1 x type LE  
Item number: 7407628



## Technical data

|                                                   |               |
|---------------------------------------------------|---------------|
| Number of CEE/Perilex openings                    | 0             |
| Number of triple openings                         | 0             |
| Number of installable devices                     | 2             |
| Number of single openings                         | 1             |
| No. of entries                                    | 0             |
| Number of oval openings                           | 0             |
| Number of square openings                         | 0             |
| Number of round openings                          | 0             |
| Number of strain reliefs                          | 0             |
| Number of double openings                         | 0             |
| Version for                                       | Support shape |
| Fastening type                                    | Lockable      |
| Labelling panel                                   | no            |
| Blanking lid                                      | no            |
| Floor covering protection frame                   | no            |
| Floor plate                                       | no            |
| Lowerable to be flush-floor                       | no            |
| Seal installation option                          | no            |
| Installation opening for on-floor tank            | no            |
| Decouplable                                       | no            |
| Suitable for labelling panel                      | no            |
| Suitable for raised floor installation            | yes           |
| Suitable for screed-flush closed underfloor ducts | yes           |
| Suitable for screed-covered underfloor ducts      | yes           |
| Suitable for cavity floor installation            | yes           |
| Suitable for wet care                             | yes           |
| Suitable for underfloor ducts                     | yes           |
| Device type                                       | Miscellaneous |
| Installation technology                           | Miscellaneous |
| With floor covering recess                        | no            |
| ROHS-conformant                                   | yes           |
| Heavy-duty version                                | no            |
| Depth                                             | 1.5 mm        |
| Strain relief option                              | yes           |
| suitable for data connection module               | Type LE       |